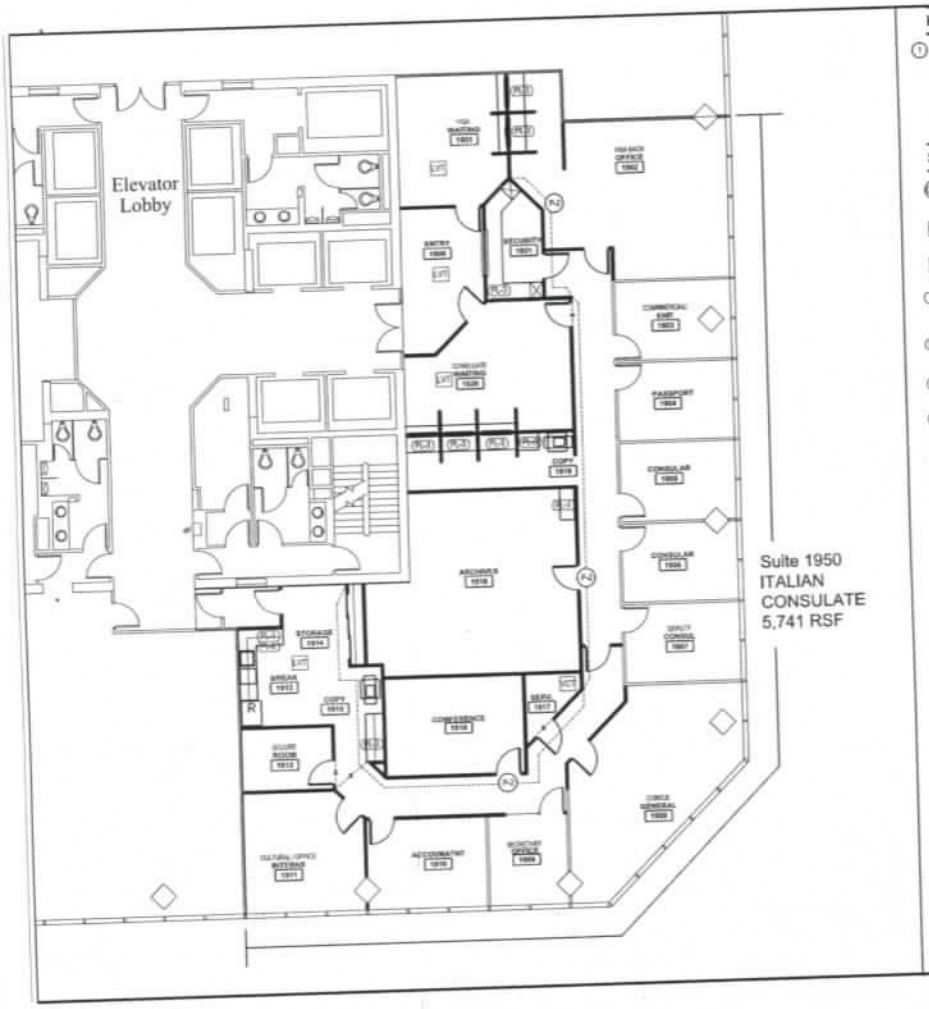

KEY NOTES

1. DOORS / METAL FRAMES TO BE PAINTED WITH WHITE ON WHITE' AD146, EGGSHELL FINISH (NOT RACO FRAME)

SYMBOLS

- (CPT-1) CARPET
  KATCRAFT, 'DECIDE' 15439
  30/32 METEORITE
  ALL AREAS U.N.O.
- (LVT) LUXURY VINYL TILE
  SHAW CONTRACT
  SOLITUDE 5MRV, 'SMOKE' 00508
- (VCT) VINYL COMPOSITE TILE
  ARMSTRONG
  'TRACERY' 51837
- (RB) RUBBER BASE 2.5"
  MANUFACTURER: ROPPE
  COLOR: 'CHARCOAL' 123
  ALL AREAS U.N.O.
- (PL-1) PLASTIC LAMINATE COUNTER TOP & 4" BACKSPLASH
  WILSONART, 'CARBON 6X' 4620-60
  MATTE FINISH
- (PL-2) PLASTIC LAMINATE FACE CABINET
  FORMICA, 'WHITE THRILL' 5259-58
  MATTE FINISH
- (PL-3) PLASTIC LAMINATE FACE/ BASE CABINET
  FORMICA, 'NEUTRAL WEFT' 5879-58
  MATTE FINISH
- (A1) WALL PAINT
  MANUFACTURER: GLIDDEN
  COLOR: 'WHITE ON WHITE' AD146
  FLAT FINISH
  ALL AREAS U.N.O.
- (A2) WALL ACCENT PAINT
  MANUFACTURER: SHERWIN WILLIAMS
  COLOR: 'PEARLY WHITE' SW 7009
  FLAT FINISH

FINISH NOTES

1. VERIFY FINISHES AND LOCATION OF FINISHES WITH 'TENANT' BEFORE PURCHASING AND INSTALLING FINISHES
2. ALL WALLS TO RECEIVE NEW PAINT (P-1) AND NEW STRAIGHT RUBBER BASE (B-1). KT CARPET AND COVED AT TILE AND LVT.
3. REMOVE ALL UNIQUE FINISHES NOT NOTED TO REMAIN AND PREPARE SURFACES TO RECEIVE NEW FINISHES.
4. REFER TO MANUFACTURERS INSTRUCTIONS FOR CORRECT INSTALLATION, TEMPERATURE AND HUMIDITY FOR INSTALLATION.
5. ALL SURFACES RECEIVING FINISHES ARE TO BE CLEAN AND FREE FROM IRREGULARITIES.
6. CONTRACTOR TO PROTECT ALL EXISTING FINISHES TO REMAIN DURING CONSTRUCTION.
7. ALL FLOOR TRANSITIONS TO BE 1/8" METAL SCHLUTER STRIP
8. INTERIOR FLOOR FINISH AND FLOOR COVERING MATERIALS SHALL COMPLY WITH SECTION 804 THROUGH 804.4.2 OF THE 2012 IBC WITH CITY OF HOUSTON AMENDMENTS
9. INTERIOR WALL AND CEILING FINISH MATERIALS SHALL COMPLY WITH SECTION 803.1 OF THE 2012 IBC WITH THE CITY OF HOUSTON AMENDMENTS

ITALINA CONSULATE

1330 Post Oak Blvd.
Houston, Tx 77056
Suite 1950

1	08/15/2019	ID	DM
	ISSUED FOR PERMIT, PRICING AND CONSTRUCTION		

Project Name: ITALIAN CONSULATE

Project Number: 18.001.00

Drawing Title: FINISH PLAN

Scale:

ID-05.00